
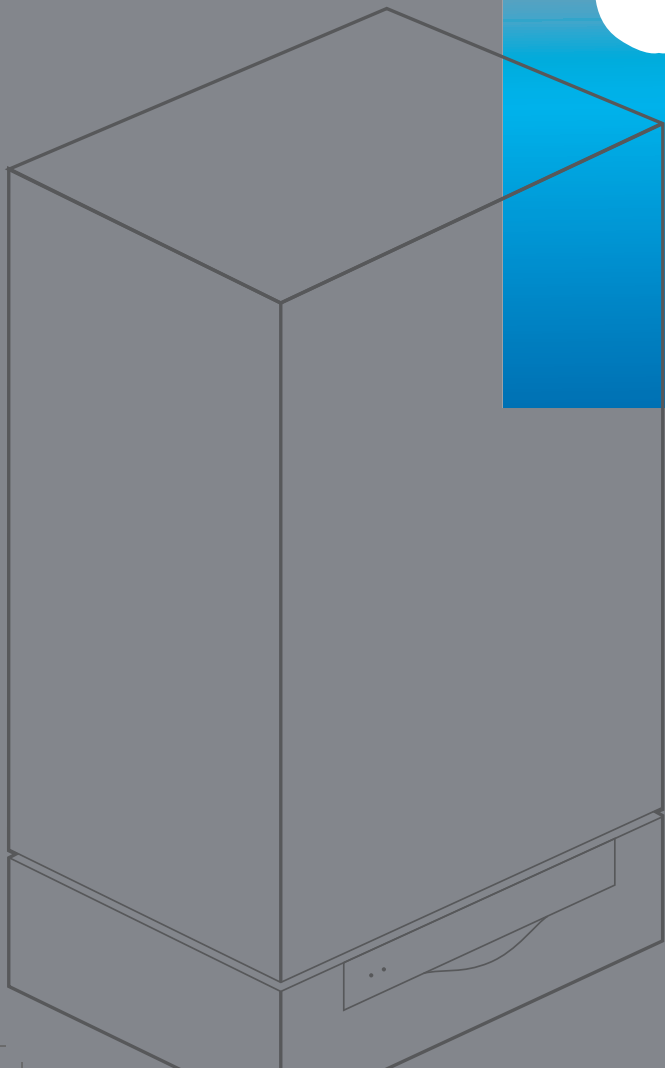


Gas-fired wall-mounted condensing boiler
Single heating boiler: 31 to 370 MBH
Multi-boiler installation: 60 to 1480 MBH

VIESMANN

VITODENS 200

*Industry-leading condensing technology for
ultimate performance, reliability and comfort*

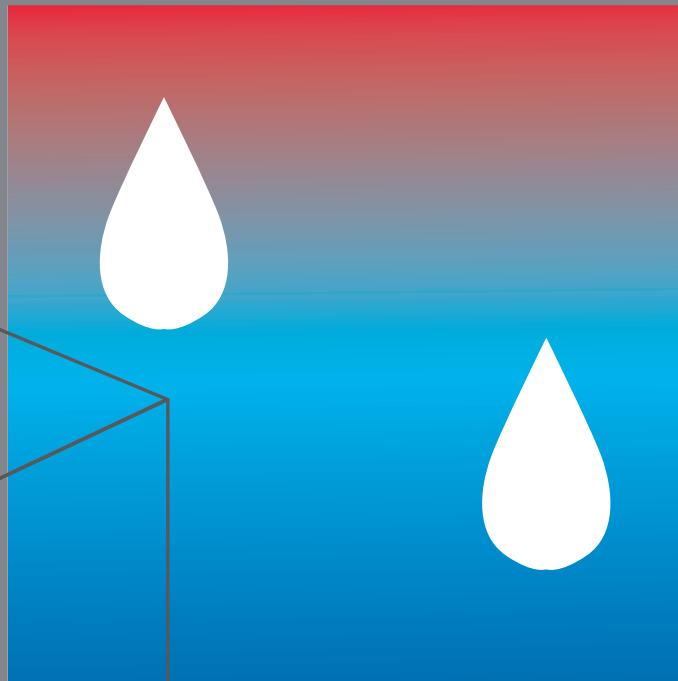

new

VITODENS 200-W

Equipped with the industry's first intelligent combustion management system and powerful control technology, the new generation Vitodens 200-W gas-fired wall-mount condensing boiler delivers unparalleled performance, reliability and comfort.

The benefits at a glance:

■ **Best Value in its Class** with new industry-leading technology and the most standard features.

new ■ **Highest Efficiency** of up to 98% at full modulation and up to 96.1% A.F.U.E. CSA thermal efficiency to ANSI Z.21.13/ CSA 4.9 of 94.5% (for model WB2B 105 only).

■ **Lasting Performance** with industry-leading Viessmann made SA240 316 Ti stainless steel Inox-Radial heat exchanger constructed to CSA B51 and ASME Section IV.

new ■ **Low-Emission Combustion** with Viessmann made stainless steel Matrix cylinder burner. Factory calibrated.

new ■ **Fast Installation and Reduced Maintenance** with Lambda Pro, industry-first intelligent combustion management system. Adjusts automatically to gas type and quality. No fuel conversion kit required.

new ■ **Powerful and User-Friendly** Viessmann Vitotronic on-board multi-function outdoor reset boiler and system control for multi-temperature space and DHW heating.


new ■ **Expanded Application Range** with increased capacity up to 370 MBH. Multi-boiler installation up to 1480 MBH with up to 4 boilers (models WB2B 45 and up).

new ■ **Greater Venting Flexibility** with increased vent length (up to 180') and multiple venting options.

- Horizontal or vertical sealed combustion coaxial venting.†
- Horizontal, vertical or hybrid sealed combustion double-pipe venting.*
- Horizontal or vertical single-wall venting.*



Viessmann made stainless steel Inox-Radial heat exchanger



Viessmann made stainless steel Matrix cylinder burner




Now equipped with Lambda Pro: Industry's first intelligent combustion management system.

■ **Compact, Lightweight Design** and zero clearance to combustibles.

■ **Extremely Quiet Operation**; quieter than most refrigerators.

■ **True High-Altitude Operation** up to 10,000 ft / 3,000 m with simple electronic adjustment.

■ **Limited Lifetime Warranty** in residential applications.

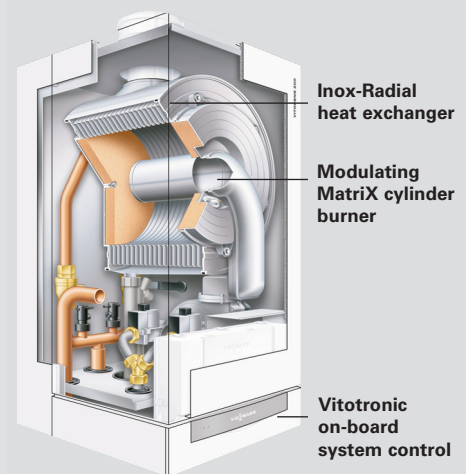

Inox-Radial heat exchanger

Modulating Matrix cylinder burner

Vitotronic on-board system control

VITODENS 200-W		WB2B	19	26	35	45	60	80	105
Rated input range		MBH	31-67	31-93	31-126	60-160	60-212	104-285	104-370
Total dimensions	Width	inches	17¾	17¾	17¾	19	19	19	19
	Height	inches	33½	33½	33½	33½	33½	33½	33½
	Depth	inches	14	14	14	15	15	21	21
Weight‡		lbs	102	102	102	155	155	225	225


‡Weight does not include installation fittings.

†Factory supplied. *Field supplied.



Viessmann Manufacturing Company Inc.
750 McMurray Road
Waterloo, ON N2V 2G5 • Canada
Tel.: 1-800-387-7373 Fax: (519) 885-0887
www.viessmann.ca

Viessmann Manufacturing Company (U.S.) Inc.
45 Access Road
Warwick, RI 02886 • U.S.A.
Tel.: 1-800-288-0667 Fax: (401) 732-0590
www.viessmann-us.com



Information subject to change without notice.