

NORITZ
TANKLESS WATER HEATERS



NRCB

COMBINATION BOILER

ease and comfort

www.noritz.com/nrcb



817-1

NRCB199DV

GHQ-C3201WX-FF US

NRCB180DV

GHQ-C2801WX-FF US

UNIT SPECS

DHW Input (BTU/h)	18,000 - 199,900	18,000 - 180,000
DHW Flow Range (GPM)	0.29 - 11.1	0.29 - 9.8
Heating Input (BTU/h)	18,000- 120,000	18,000- 100,000
Heating Capacity Max (Output) MBH (kBTU/h)	109	92
AFUE	95%	95%




The new hero IN HOME HEATING & hot water

HIGHLIGHTS

- Simultaneous Operating of DHW & Heating
- Stability and Quick Temperature Control of DHW & Heating
- High Delivering Capacity of DHW (Max 199/180kBtuh)
- All Stainless Steel Heat Exchangers (3 total)
- Ultra Low Emissions by Premix Burner

GENERAL INFO

Heating Temp Range	80°F -180°F 27°C - 82°C
DHW Temp Range	90°F -140°F 32°C - 60°C
Elevation	Up to 10,000 ft
Warranty	10 years Heat Exchanger 5 years Parts 1 Year Labor

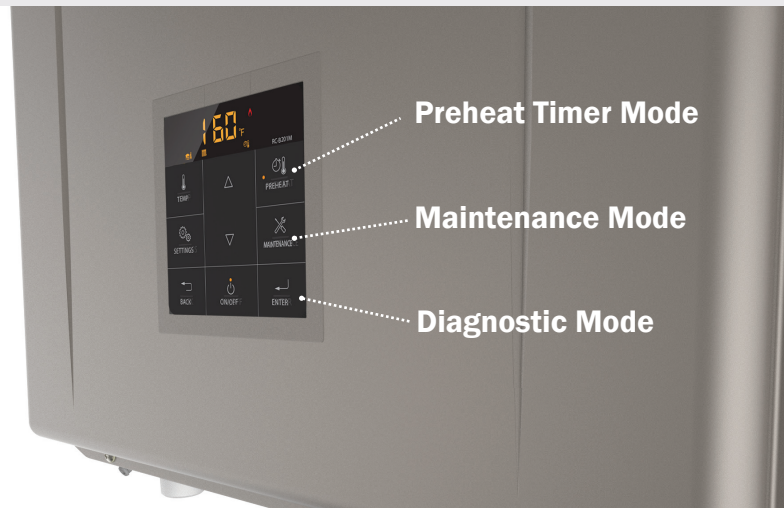

FEATURES of comfort

- External Pump Control for Secondary Heating Loop
- Mixing Valve for Domestic Hot Water Side
- Outdoor Temperature Sensor Included
- DHW Preheat for Plate Heat Exchanger
- DHW Recirculation Capable